

# Two Dimensional Flow Simulation in Twin Screw Food Extruder Die

Kehinde Adedeji. Adekola

Department of Agricultural Engineering, Jilin University, Changchun, China  
Email: profkola@sina.com

**Abstract** – In this study, two-dimensional flow simulation in food extruder die for intermeshing co-rotating twin-screw extruder were performed by solving Navier-Stokes equation and continuity equation for non-Newtonian fluid using finite element computer package, ANSYS/FLOTRAN. The objective of the study is to determine the nature of flow, heat and pressure distribution in the die and to determine the effect of screw speed on process parameters such as temperature, pressure and flow rate in the die. Four different die geometries were used. The levels of temperature considered were 120, 140, 160 and 180 °C. The screw speeds (taken as inlet velocity for the die) were 120, 160, 200 and 240 rpm. The results are presented for the flow profile, pressure distribution, temperature distribution and flow rate. For all the velocities considered, temperature has no significant effect on the velocity vector. The flow rate increases with increase in inlet velocity. Extruder throughput has a significant effect on the flow rate as reflected in higher flow rate recorded for increased throughput. Dough temperature has no effect on flow rate within the temperature range of 120 °C to 180 °C. The temperature of the dough decreases as it flows through the die. The values of temperature obtained for die exit temperature by simulation and experiment compare favorably. This shows that the simulation procedure employed is reliable enough to accurately predict the temperature of the dough at any point in the die.

**Keywords** – Extruder Dies, Flow, 2-Dimensional.

## I. INTRODUCTION

A thorough knowledge of the flow behavior inside an extruder provide an insight into the mechanism of mixing and facilitates estimation of RTD, flow rate, pressure drop and power consumption. The flow pattern may be derived from theoretical velocity profile for food mix in the extruder for Newtonian and non-Newtonian fluids under isothermal and non-isothermal conditions for single-screw extruder (Della, et al, 1993). The same approach had also been used for twin-screw extruder with intermeshing, counter-rotating screws (Yang and Manas, 1992) to determine material flow pattern.

Until recently, very little work has been published on the mechanism of material flow and energy transfer in intermeshing co-rotating extruder mainly due to the complexity of the geometry and the flow behavior. In an attempt to simplify the complex process, Sastrohartono *et al*, 1991 divided the flow in twin screw extruder barrel into two regions: the translational region and the intermeshing/mixing region. They used finite difference method for the simulation of the translational region, while a finite element method is used for the simulation of the intermeshing region. They concluded that the method can be applied to others screw geometries such as those of

self-wiping and fully intermeshing twin screw extruder. This is the only work available to have used finite method to model flow and heat transfer in twin screw extruder. So far, there is no reported work in literature on the flow and heat analysis in the die of twin screw extruder.

In their work (Adekola *et al*, 1998) had proposed a method for estimating temperature profile in food extruder die. Three important approaches were used to determine the temperature field in the die, a) by conduction in radial dimension, b) by convection in axial direction and c) by viscous dissipation. Emphasis was placed on food extruder with circular cross-section. This shape represents the majority of the shapes used in food extruders. In order to simplify the equation of flow in dies, the following assumptions were made: 1) The flow is laminar and steady. 2) The dough is incompressible and isotropic with constant thermal properties. 3) Rotational symmetry 4) Kinematically developed velocity profile in entrance section. 5) No slip at wall. 6) Heat transport axially by convection and radially by conduction only. So far, there is no reported work in literature on the flow and heat analysis in the die of twin screw extruder.

The first application of flow analysis network (FAN) more generally known as control volume (CV) to describe twin screw flow was reported (Szydlowski and White, 1987, Kim and White, 1989). Their visualization projected the field into a Cartesian (rectangular) co-ordinate system, with the screw held stationary and the barrel moving relative to the flow cavity. The flow pattern within the intermeshing zones of the twin screw extruder, most studies concluded that product temperature (150-200°C) and pressure (5-19MPa) increase primarily when a flow restriction is present (Ollet *et al*, 1989).

Van der Wal *et al*, 1996 successfully used finite element package Sepran to perform 3- dimensional flow simulation of kneading elements in an intermeshing corotating twin screw extruder by solving Navier Stokes equations for plastic extrusion. The objective of the calculation is to study the influence of factors such as a shear rate, elongation rate, pressure on mixing and the flow profile in an extruder on various extruder parameters such as fluid viscosity, rotational speed and throughput.

Works on either 2 or 3-dimensional finite element analysis for food extrusion in literature are limited. The application of the method to extruder die is unknown. As a result, it is intended in this present work to carry out some works in that direction. In all the published studies reviewed, flow pattern modeling was restricted to various sections of the extruder screw (compression, melting and metering sections) with virtually no mention of the pattern in extruder die.

Therefore, the objective of this present study is to determine the nature of flow, heat and pressure distribution in the die and to determine the effect of screw speed on process parameters such as temperature, pressure and flow rate in the die.

## II. SIMULATION PROCEDURE

Two-dimensional flow simulation in extruder die for intermeshing co-rotating twin screw extruder was performed by solving Navier Stokes equation using the finite element computer package, ANSYS FLOTTRAN. The package is a finite element tool for analyzing flow and carrying out heat analysis. The theory of heat and fluid flow fundamentals used in the analysis is provided in the program manual (ANSYS, 2009).

This package was adapted for use in food extruder die in this study. This will be the first time that a work on simulation and modeling of flow, heat and pressure distribution in food extruder die single or twin screw alike is being reported. The objective of the study is to determine the flow, heat and pressure distribution in the die. It is also to determine the effect of screw speed on process parameters such as temperature, pressure and flow rate in the die using different dies.

Four different geometries of die were used (Fig. 1). In this work, screw speeds (which translate into inlet velocity for the die) used for simulation are 120, 160, 200 and 240 rpm. The die temperatures studied are 120, 140, 160 and 180 °C.

Due to the complex nature of the dough flow in the die, the following assumptions were made for the analysis:

1. The flow is steady and laminar. This is because the dough flow is highly viscous and slow moving.
2. The flow is incompressible i.e. the density is constant. With this assumption, temperature equation for incompressible flow neglects kinetic energy changes and viscous dissipation.
3. The dough is Newtonian.
4. The flow is isothermal.
5. The element/cavity of the die is completely filled.

For FLOTTRAN analysis carried out, the steps were divided into two parts: pre processing and post processing. The processing steps in sequence are as follows:

1. Specification of analysis title and preference. In this step, the title selected is food extruder die analysis. The preference is FLOTTRAN because the analysis involved is fluid flow.
2. Definition of element type. 2D-flow analysis selected.
3. Create areas of the die geometry to be analyzed. Four die geometries were created (Fig. 1) and used in the simulation work.
4. Define lines, mesh, plot elements and nodes. The mesh shape selected is triangle (Fig. 2) for optimum analysis. The finite element mesh (Fig. 2) used has been chosen sufficiently fine to ensure satisfactory overall accuracy. The nodal points are sufficient to determine the value of process parameters at any point in the extruder die.

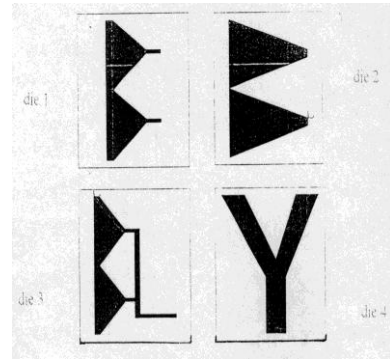


Fig.1. Geometries of dies used for Flotran analysis

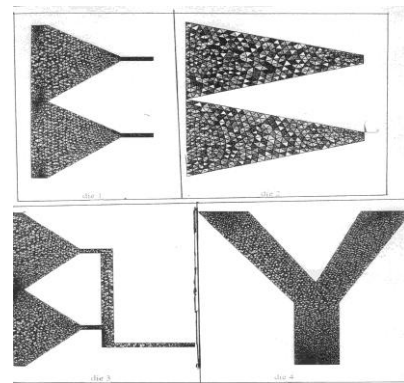


Fig.2. Meshing diagram of dies used in Flotran analysis

5. Apply velocity boundary conditions. Velocity loads of 160 rpm (0.5m/s) and 180 rpm (0.625m/s) were applied in sequence to the nodes at the inlet of the die. These screw speeds represents the inlet velocities of the food dough into the die. Velocity load of 0m/s was applied to the boundary nodes. The rotational speed of the screw (rpm) was changed to linear speed (m/s)
6. Apply thermal boundary condition. Temperature loads of 393, 413, 433 and 453K were applied to the nodes at the inlet of the die. These temperatures represent the temperature of the dough entering the die.
7. Set FLOTTRAN solution options and execution controls. Two hundred simulation runs was selected for each of the input process parameter.
8. Set dough properties: Density was set at 1250 kg/m<sup>3</sup>, viscosity set at 12770 Pa.s, specific heat is 2.7 KJ/Kg.K, and thermal conductivity is 0.2 W/m.K (Adekola, 1999)
9. Set FLOTTRAN flow environment parameters
10. Solve the problem
11. Read in result and Plot the temperature solution
12. Plot streamline contours
13. Plot velocity vectors
14. Plot particle traces contoured by temperature 'temp'
15. Plot particle traces contoured by velocity magnitude 'Vsum'

## III. RESULTS AND DISCUSSIONS

Results are presented for the flow profile, pressure, temperature and flow rate for the four dies used in this study. These process parameters are considered the most important for die design, extrusion processes

synchronization and modeling of heat and flow distributions in the die. The parameters have also been proved by earlier experiments findings (Adekola, 1999) to have significant effect on the food dough and on the quality of the extrudate produced. The geometries of the dies are given in Fig. 1. Different shapes and sizes were used for the simulation to show the effects of studied process parameters on the die. This will help in the optimum selection of die for different purposes intended. Since it is assumed that the dough is incompressible the effects of density variation were not studied. Temperature of the dough at the die inlet and inlet velocity of the dough into the die were the two variables considered. The values of the inlet velocity studied are 0.375, 0.5, 0.625 and 0.75m/s and the value of the temperatures studied are 433K and 453K.

#### A. The Flow Profile

Figures 3 and 4 show the velocity vector plots for the dies at inlet velocity of 0.5m/s and 0.625m/s respectively. These profiles are similar for other speeds considered. Temperature has no significant effect on the velocity vector. The concentration of the vector increases, as the cross-sectional area becomes smaller. The vectors are relatively linear in the transition section of the die because of the larger area and get concentrated towards the die exit.

Dies 1 and 2 show large concentration of velocity vector towards the die nozzle outlet. This is expected since velocity is proportional to area. However, dies 3 and 4 produced opposite results. Die 4 has too large die exit diameter the same as the inlet therefore the velocity vector are equally distributed within the die. Die 3 has a long die length and as such the flow becomes uniform and stabilized towards the die exit. It could be expected that the extrudate produced by dies 3 and 4 would be smoother and have less expansion ratio than those produced by dies 1 and 2. This is because the pushing force required to force out the extrudate is minimized.

The magnitude of the velocity vector increased with increase in inlet velocity. The general trend is to have higher magnitude at the narrower part of the die. For an inlet speed of 0.5m/s, the highest vector magnitude obtained was 0.87m/s in die 1, an increase of 0.37m/s while for inlet speed of 0.625m/s, the highest vector magnitude obtained was 0.99m/s.

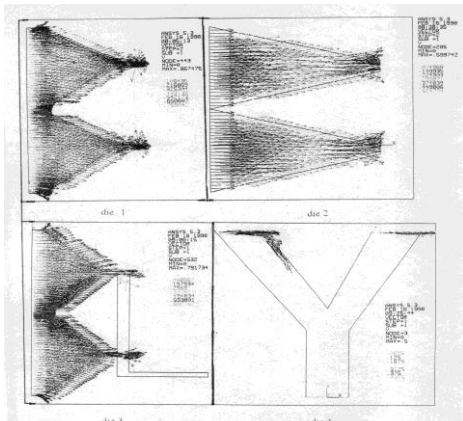


Fig.3. Velocity vector diagram at inlet velocity of 0.5m/s

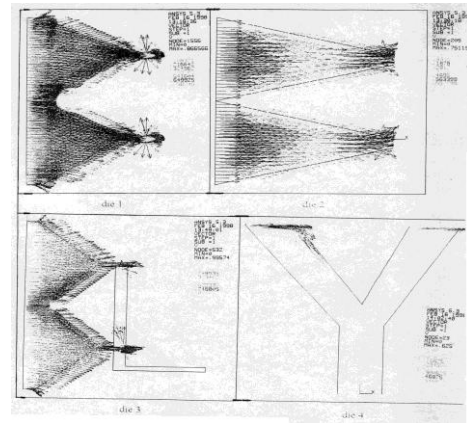


Fig.4. Velocity vector diagram for inlet velocity of 0.625 m/s

#### B. Flow Velocity

The relationship between the flow velocity of dough in the die and the inlet velocity is given in Fig. 5. The flow velocity increases with increase in inlet velocity. The highest flow velocity obtained are higher than the inlet velocity for all the dies studied except die 4 which recorded the highest flow velocity as equal to inlet velocity. The reason may be that the dimensions of the die at the die inlet and outlet are the same.

It was also observed that since the inlet cross-sectional area of the die is smaller, the quantity of dough into the die is smaller. This accounts for general low values of flow rate for die 4 when compared with other dies. This shows the flow throughput has a significant effect on the flow velocity. The biggest velocity difference between the inlet velocity and flow velocity was 0.2034 m/s (die 3) for all the cases considered.

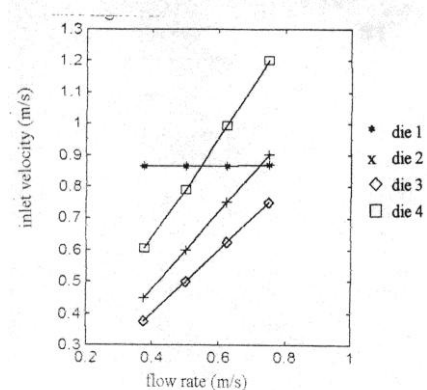


Fig.5. Relationship between the flow velocity and inlet velocity for different dies

The simulated highest flow velocity and inlet velocity is related by the following equations below. The flow rate 'Vsum' for the dies are shown in Fig. 6 for inlet velocity of 0.5m/s and Fig. 7 for inlet velocity of 0.625m/s. Dough temperature has no effect on the flow velocity within the temperature range (393 – 453K) considered.

$$\begin{aligned}
 F &= 0.0072V + 0.8629 && \text{for die 1} \\
 F &= 1.2120V - 0.0063 && \text{for die 2} \\
 F &= 1.6320V - 0.0243 && \text{for die 3} \\
 F &= 1.0000V - 0.0000 && \text{for die 4}
 \end{aligned}$$

where  $F$  is the simulated highest flow velocity and  $V$  is the inlet velocity. The correlation coefficient,  $r$  for the equations above are as follows die 1 (0.954), die 2 (0.983), die 3 (0.919), and die 4 (0.966).

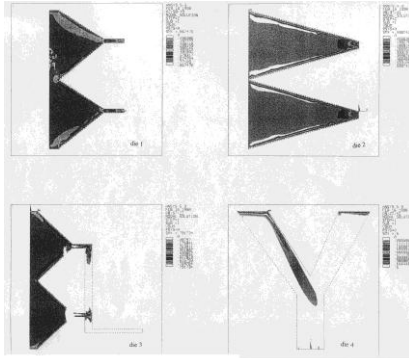


Fig.6. Flow distribution for dies at inlet velocity of 0.5 m/s

### C. Dough Temperature

The highest temperature obtained is almost the same as the input inlet temperature within the range of  $\pm 2^\circ\text{C}$ . The temperature reduces as the dough flow through the die. The low temperatures obtained are at the exit of the die nozzle for all the dies. The lowest temperature obtained is 293K for all the input temperature. Fig. 8 shows the temperature distribution in the dies for inlet temperature of 433K. The trend is similar for the temperatures considered. The simulated results for die exit temperatures compare favorably with the results obtained during experiments for dies 1 and 2 (Fig. 9).

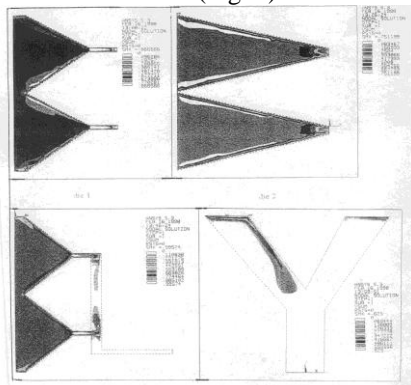


Fig.7. Flow distribution for dies at inlet velocity of 0.625 m/s

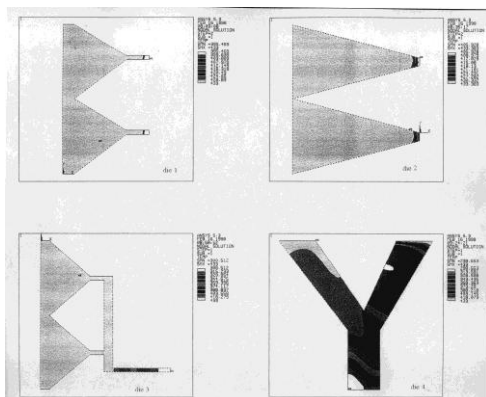


Fig.8. Temperature distribution for inlet temperature of 433K

At higher screw speed, the minimum temperature in the die decreased (Fig. 10). The temperature differences between the maximum and minimum values obtained for the dies are 37.53K, 27.07K, 132.49K and 134.35K for dies 1, 2, 3 and 4 respectively. High temperature difference such as those obtained above caused variation in the quality of extrudate produced and could be responsible for the burning often experienced during extrusion cooking. Although, the dough residence time in the die is short, it is not unlikely that a wide temperature variation within a short time and length will not affect the chemical food constituent of the dough in the die.

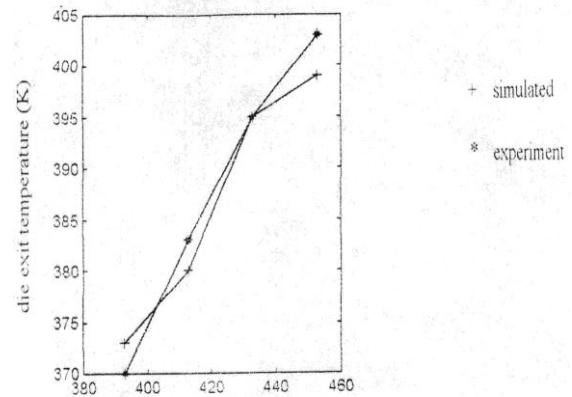


Fig.9. Simulated and experimental values for die exit temperature

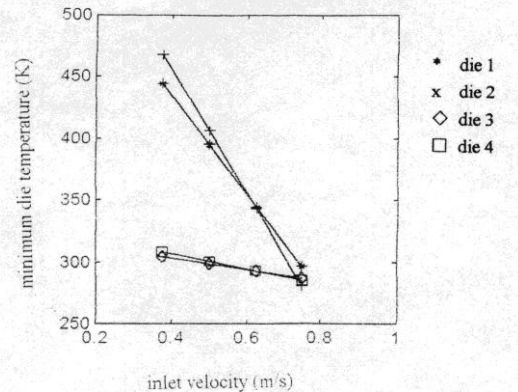


Fig.10. Relationship between inlet velocity and minimum die temperature

### D. Die Pressure

It is important to calculate the build up pressure before the extrudates are out and to estimate the pressure distribution in the die. Fig. 11 shows the effects of inlet velocity on pressure. Fig. 12 shows the pressure distribution for the dies studied at inlet velocity of 0.5 m/s and inlet temperature of 433 K. The pressure increases with screw speed. The pressure at the die exit is lower than the highest pressure recorded for all the simulation runs. In fact, as the dough gets to the dough exit, there is pressure drop. A pressure drop of more than 0.8 MPa between the entrance and exit of the die was obtained.

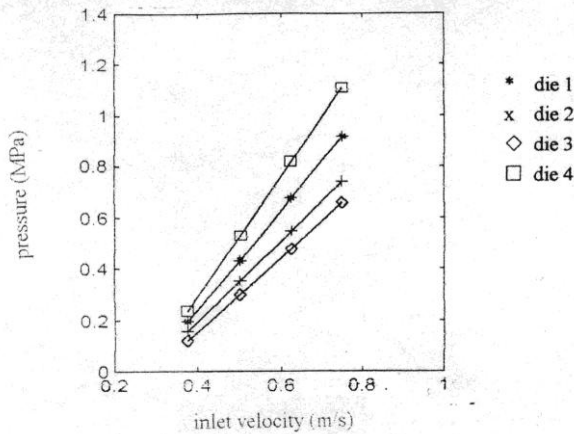


Fig.11. Relationship between inlet velocity and pressure at 0.5 m/s and 433K

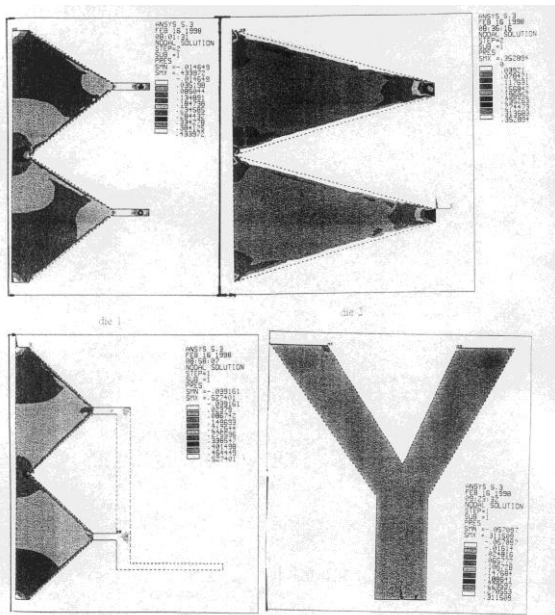


Fig.12. Pressure distribution for dies at inlet temperature of 433K and inlet velocity of 0.5m/s

The pressure at the die exit is lower than the highest pressure recorded for all the simulation runs. In fact, as the dough gets to the dough exit, there is pressure drop. A pressure drop of more than 0.8 MPa between the entrance and exit of the die was obtained.

The highest value of 0.434 MPa obtained for die 1 compares favorably with the experimental result. The following equations relate the simulated pressure obtained and the inlet velocity for the dies.

$$P = 1.928V - 0.530 \quad \text{for die 1}$$

$$P = 1.559V - 0.427 \quad \text{for die 2}$$

$$P = 2.327V - 0.636 \quad \text{for die 3}$$

$$P = 1.433V - 0.416 \quad \text{for die 4}$$

where P is the simulated pressure and V is the inlet velocity. The correlation coefficient, r for the equations above are die 1 (0.955), die 2 (0.976), die 3 (0.994), and die 4 (0.981) respectively.

## IV. CONCLUSION

With this type of simulation, it is possible to estimate the value of pressure, temperature, flow velocity e.t.a. at any point within the die. This cannot be done experimentally even with present sophisticated technique and instrumentation. The simulation also made it possible to know the range values of pressure, temperature and flow rate.

These process parameters are important in die design and modeling. It is evident from the simulation results that the effect of die length, diameter and throughput are also significant. This can help to understand why expansion characteristics differ with dies even with the same dough constituents, this cannot be explained by experiments alone because of the sensitive nature of food dough. Selection of inlet velocity (assumed to be screw speed) into the die is very important as it affects all the process parameters.

Studies are needed on the simulation and modeling of influence of changes in viscosity and density of dough during extrusion on process parameters, flow and heat distribution. Analysis may be extended to 3-dimensional analysis for flow in food extruder analysis to enhance further understanding of the die internal mechanism.

## REFERENCES

- [1] Adekola, K. A. (1999). Studies into twin screw food extruder die. Ph.D Thesis. Changchun, China. Jilin University of Technology, Department of Agricultural Engineering. pp. 135 – 158
- [2] Adekola, K.A., Ma, C.L. and Zuo, C.C. (1998). Estimation of temperature profile in food extruder dies. Transactions of Chinese Society of Agricultural Engineering, 14(3), pp. 226-230.
- [3] ANSYS / FLOTRAN 1998. Operating Manual (Analysis and Theory Guides).
- [4] Della Valle, G., Barres, C., Plewa, J. and Vergnes, B. (1993). Computer simulation of starchy products transmission by twin-screw extrusion. J. Food Eng., 19, pp. 1-31.
- [5] Eise, K., Curry, J. and Nangeroni, J.F. (1983). Compounding extruders for improved polybends. Polym. Eng.Sci., 23, pp. 642-646.
- [6] Kim, M.H. and White, J.L. (1989). Simulation of flow in modular tangential counter-rotating twin screw extruders: screw flight staggering and backward pumping elements. SPE ANTEC Technical Paper, 35: 49.
- [7] Ollet, A.L., Li, Y., Parker, R. and Smith, A.C. (1989). A comparative study of the conveying performance of screw in a twin screw co-rotating extrusion cooker. J. Food Eng., 10, pp. 165-181.
- [8] Sastrohartono, T., Mukund, V.K., Jaluria, Y. and Tai, H.K. (1991). Numerical simulation of fluid flow and heat transfer in a twin screw extruder. Publication no. F10544-5-91 of the New Jersey Agricultural Experimental Station, pp. 89-104.
- [9] Szydlowski, W. and White, J.L. (1987). An improved theory of metering in an intermeshing co-rotating twin screw extruder. Adv. Polym. Technol., 7(2): 177.
- [10] Van Der Wal, D.J., Goffart, D., Klomp, E.M., Hoogstraten, H.W. and Janseen, P.B.M. (1996). Three-dimensional flow modeling of a self-wiping corotating twin screw extruder. Part II: The kneading section. Polym. Eng. Sci., 36, 7, pp. 912-924.
- [11] Yang, H.H. and Manas-Zloczower, I. (1992). Flow profile in kneading elements in the intermeshing corotating twin screw extruder. Polym. Eng. Sci., 32: 1411.

## **AUTHOR'S PROFILE**



### **Kehinde Adedeji Adekola, Ph.D. 47**

is a Nigerian and he has been involved in teaching, research and consultancy at University level for about 25 years. He got his Ph.D. degree in Agricultural Engineering (Emphasis in Agricultural Products Storage and Processing Engineering) from Jilin University, Changchun, P.R. China in 1999. Presently, he is a Senior Research Fellow/Associate Professor at the Jilin University. He has written and presented many academic articles in reputable journals, conferences and meetings. He is also a reviewer for some reputable academic journals. His research interests include: Food Engineering, Computer Applications in Agriculture, Process Engineering, Agricultural Products Packaging and Transportation, Agricultural Production Systems and Policy, Appropriate Technology and Energy Utilization. He is a member of professional and social organizations such as Nigerian Society of Engineers, Council of Registered Engineers of Nigeria, Nigerian Institution of Agricultural Engineers, American Society of Agricultural and Bio-Resources Engineers, Chinese Society of Agricultural Engineers and Jaycees International.